


PRESTACIONES-DIMENSIONES | AP | 5000-4
 VENTILADORES CENTRIFUGOS LINEA PR (SERIE 5000AP)
 $Q=(m^3/min)$ $Ps=(mm\ c/a)$

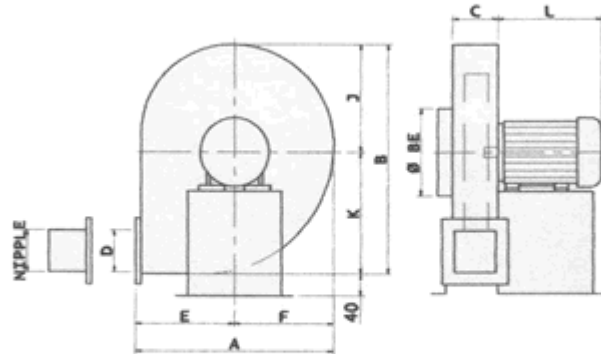

DIMENSIONES APROXIMADAS [mm]

MODELO	A	B	C	D	NIPPLE	ØBE	E	F	J	K	L
5515AP	351	380	65	65	2"	100	161	190	204	176	211
5525AP	486	526	65	65	2"	125	223	263	283	243	211
5527AP	535	579	75	75	2"	152	245	290	312	267	234
5527/2AP	535	579	80	80	3"	152	245	290	312	267	234
5528AP	584	632	90	90	2,5"	175	268	316	340	292	234
5528/2AP	584	632	120	120	4"	220	268	316	340	292	327
5529AP	658	712	100	100	3"	220	301	357	383	329	276
5530AP	707	766	110	110	4"	235	324	383	412	354	276
5530/2AP	707	766	110	110	4"	235	324	383	412	354	306
5531AP	780	845	150	150	6"	260	357	423	455	390	327
5532AP	854	925	150	150	6"	280	391	463	498	427	372

PRESTACIONES

MOD.	MOTOR	PRESION ESTATICA							
		120	250	300	400	500	600	700	800
2800 RPM	5515AP 0.5HP-2800RPM Q	3							
	5525AP 0.75HP-2800RPM Q	4							
	5527AP 1HP-2800RPM Q	6							
	5527/2AP 1.5HP-2800RPM Q	10							
	5528AP 1.5HP-2800RPM Q	6							
	5528/2AP 5.5HP-2800RPM Q	23							
	5529AP 2HP-2800RPM Q	6							
	5530AP 3HP-2800RPM Q	6							
	5530/2AP 4HP-2800RPM Q	10							
	5531AP 5.5HP-2800RPM Q	10							
	5532AP 7.5HP-2800RPM Q	13							

SUJETO A VARIACION SIN PREVIO AVISO